

## Programmable Phase Locked Loop Surface Mount Module

Applications	Application Notes
--------------	-------------------

- |   |   |
|---|---|
| <ul style="list-style-type: none"> <li>Wireless Broadband Access</li> <li>Microwave Radios</li> <li></li> </ul> | <ul style="list-style-type: none"> <li>AN-107: Manual Soldering Technique</li> <li>AN-202: Programming Z-COMM PLLs</li> </ul> |
|---|---|

Performance Specifications	Min	Typ	Max	Units
Frequency	4900		4975	MHz
Phase Noise @ 10 kHz offset (1 Hz BW)		-86		dBc/Hz
Harmonic Suppression (2nd)		-25		dBc
Spurious Suppression		-70		dBc
Power Output	1	3.75	6.5	dBm
Load Impedance		50		$\Omega$
Step Size		1000		kHz
Phase Detector Frequency		1000		kHz
Settling Time		1.5		mS
Charge Pump Output Current		5000		$\mu$ A
Operating Temperature Range	-40		85	$^{\circ}$ C
Package Style		PLL		

Power Supply Requirements	Min	Typ	Max	Units
Supply Voltage 1: PLL (Vcc, nom)		5		Vdc
Supply Voltage 2: VCO (Vcc, nom)		N/A		Vdc
Supply Current 1: PLL (Icc, typ)		45		mA
Supply Current 2: VCO (Icc, typ)		N/A		mA

Reference Oscillator Signal	Min	Typ	Max	Units
Frequency		10		MHz
Phase Noise @1 kHz Offset		-145		dBc/Hz

Additional Notes
------------------



Phase Locked Loop Internal IC: Analog Devices / ADF4106

Programmable Phase Locked Loop  
Surface Mount Module


Phase Noise, typ.

Footprint

PHASE NOISE (1 Hz BW, typical)

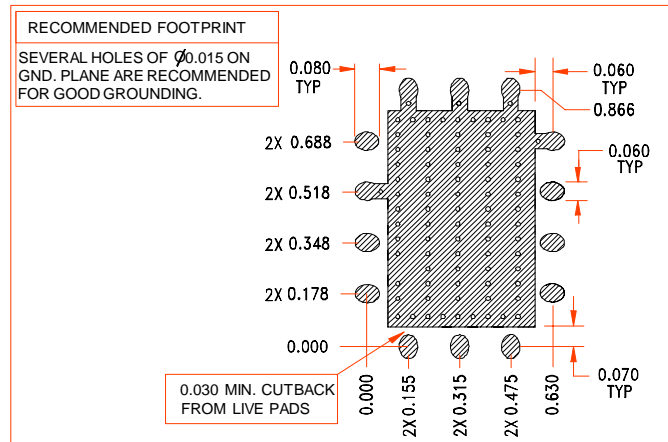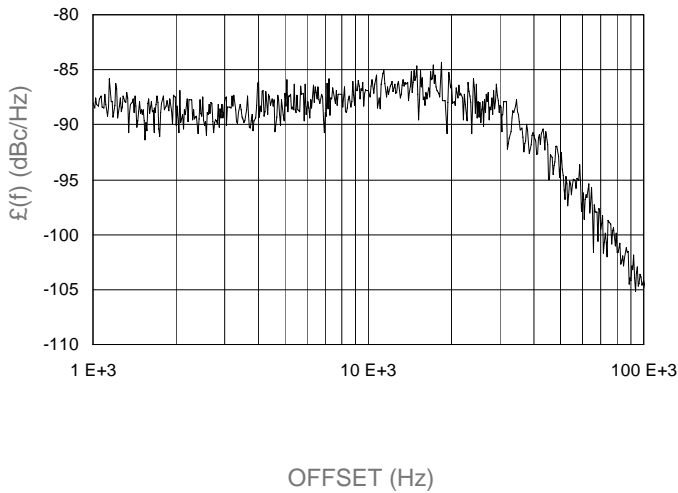

Physical Dimensions

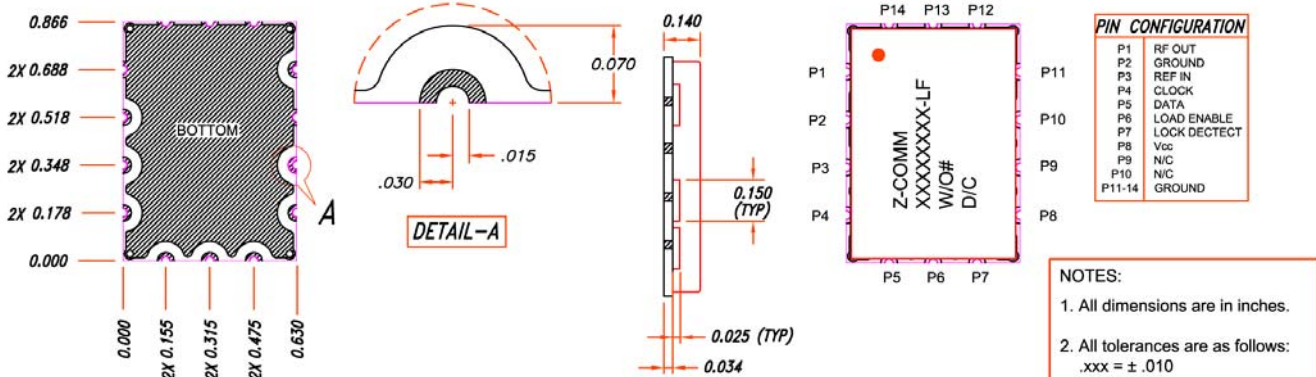

LFSuffix = RoHS Compliant. All specifications are subject to change without notice.

© Z-Communications, Inc. All Rights Reserved.

URL: [www.zcomm.com](http://www.zcomm.com) | EMAIL: [applications@zcomm.com](mailto:applications@zcomm.com)