

V950ME08-LF

PHASE NOISE (1 Hz BW, typical)

Rev C3



EMAIL: applications@zcomm.com

Voltage-Controlled Oscillator Surface Mount Module


Applications

Point-to-Point Radio Satellite Communications Direct Broadcast

Application Notes

AN-101: Mounting and Grounding

AN-102: Output Loading AN-107: Manual Soldering

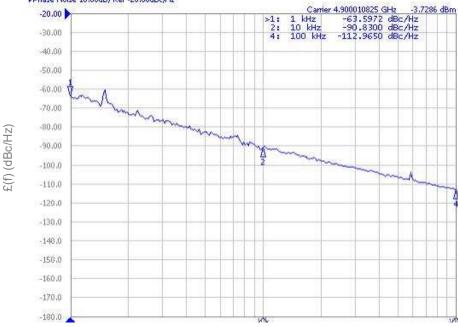

OFFSET (Hz)

Performance Specifications	Min	Тур	Max	Units
Oscillation Frequency Range	4450		5350	MHz
Phase Noise @ 10 kHz offset (1 Hz BW)		-87		dBc/Hz
Harmonic Suppression (2nd)		-22	-20	dBc
Tuning Voltage	0		9.5	Vdc
Tuning Sensitivity (avg.)		120		MHz/V
Power Output	0	3	6	dBm
Load Impedance		50		Ω
Input Capacitance			50	pF
Pushing			11	MHz/V
Pulling (12 dB Return Loss, Any Phase)			14	MHz
Operating Temperature Range	-40		85	°C
Package Style		MINI-16-SM		

Phase Noise 10,00dB/ Ref -20,00dBc/Hz


Power Supply Requirements	Min	Тур	Max	Units
Supply Voltage (Vcc, nom.)		5		Vdc
Supply Current (Icc)		27	33	mA

Additional Notes

Rev C3

Tuning Curve, typ.



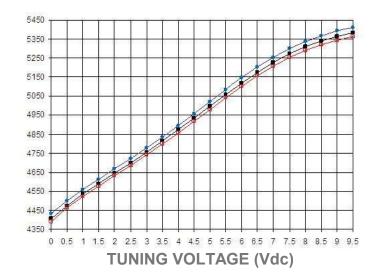

85°C


25°C


-40°C

Power Curve, typ.

Footprint

RECOMMENDED FOOTPRINT

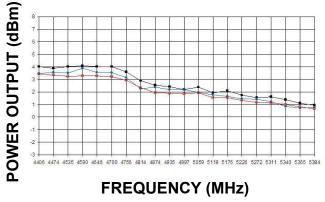

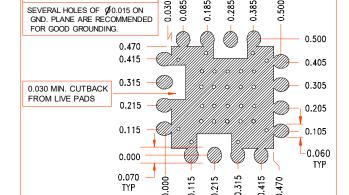


■ 85°C

■ 25 °C

● -40°C

Physical Dimensions

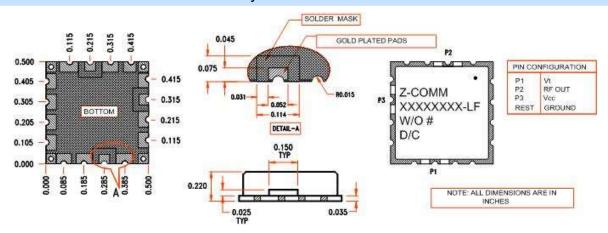

LFSuffix = RoHS Compliant. All specifications are subject to change without notice.